




AL.5.120/..

- for normal loads
- three-dimensional absorption of movements
- anti-slip surface
- solid full-aluminium structure

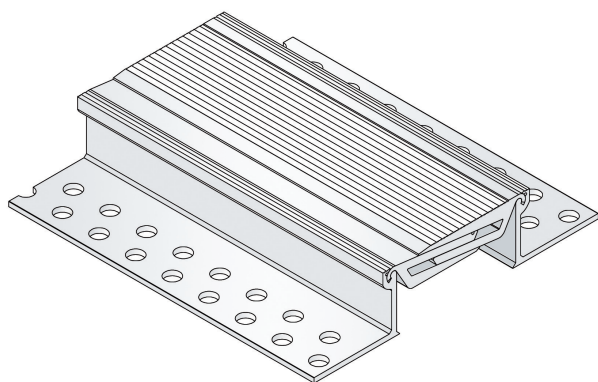

FEATURES

resistant to heavy loads, trafficable by fork-lift trucks, punched bearing legs guarantee best connection to the subgrade/covering.

APPLICATIONS

all industrial applications, shopping centres, railway stations, airports, exhibition halls

MATERIAL

aluminium

COVERING TYPES

coating, concrete, screed, industrial covering, natural and stone slabs

TRAFFICABILITY

industrial trucks (lifting trucks, fork-lifts etc.), passenger car, trucks

FORMED PARTS

corner piece, T piece, cross piece, transition floor to wall

NOTES

We recommend that the customer applies grout between profile and covering so as to avoid typical hairline cracks.


From a Profile height of 200 mm gusset plates are fixed on the sides to reinforce the Profile.

Technical data

Movement horizontal:	40 mm (±20 mm)
Movement vertical:	20 mm (±10 mm)
Visible width:	120 mm
Maximal joint width:	95 mm
Load rating:	wheel load 1000 kg up to Ø 150 mm, B = 100 mm
Load rating trucks:	300 kN (DIN 1072)
Load rating forklifts:	70 kN (DIN 1055-3)
Supply length:	3 mtr

Designs

Article No.	Profile height (h)	Recess(WxD)
AL.5.120/25	25 mm	280 x 35 mm
AL.5.120/37	37 mm	280 x 47 mm
AL.5.120/50	50 mm	280 x 60 mm
AL.5.120/65	65 mm	280 x 75 mm
AL.5.120/80	80 mm	280 x 90 mm
AL.5.120/100	100 mm	310 x 110 mm
AL.5.120/120	120 mm	310 x 130 mm
Special heights on request.		

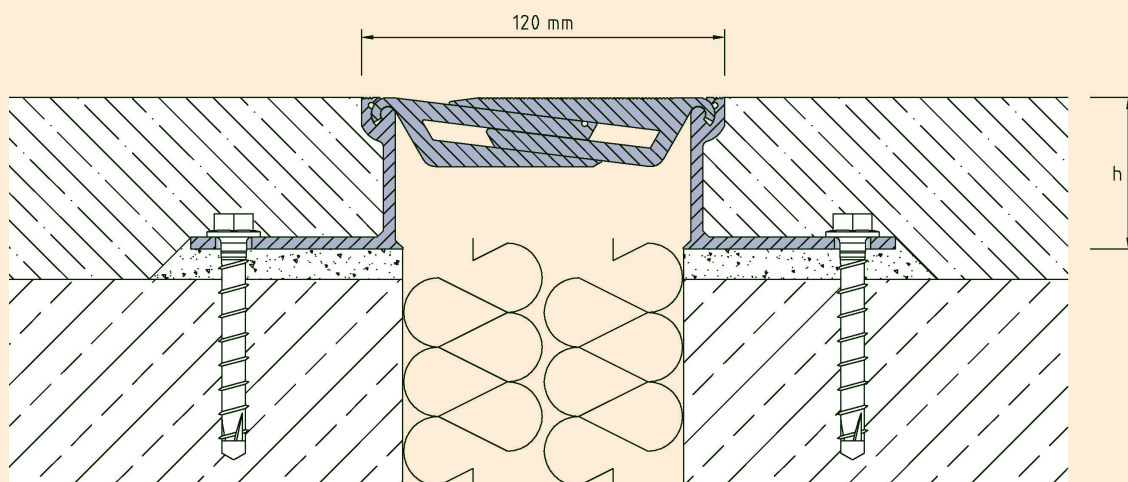

AL.5.120

Subject to technical change without notice.