




AL.5.210/..

- for normal loads
- three-dimensional absorption of movements
- anti-slip surface

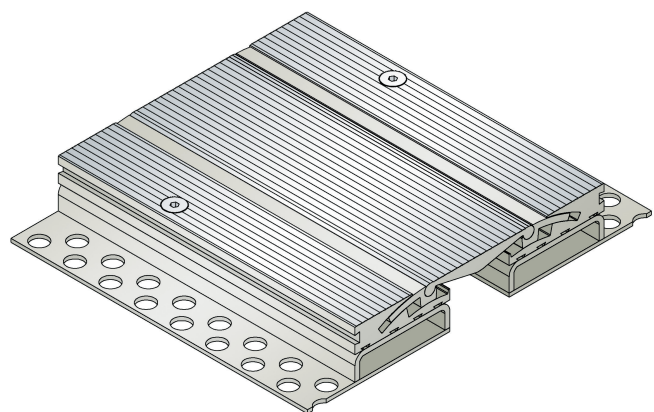

FEATURES

resistant to heavy loads, trafficable by fork-lift trucks, punched bearing legs guarantee best connection to the subgrade/covering.

APPLICATIONS

all industrial applications, shopping centres, railway stations, airports, exhibition halls

MATERIAL

hot-dip galvanised steel substructure and aluminium surface

COVERING TYPES

coating, concrete, screed, industrial covering, natural and stone slabs

TRAFFICABILITY

industrial trucks (lifting trucks, fork-lifts etc.), passenger car, trucks

FORMED PARTS

corner piece, T piece, cross piece

NOTES


We recommend that the customer applies grout between profile and covering so as to avoid typical hairline cracks.

Technical data

Movement horizontal:	30 mm (-10/+20 mm)
Movement vertical:	10 mm (± 5 mm)
Visible width:	210 mm
Maximal joint width:	50 mm
Load rating:	wheel load 1000 kg up to \varnothing 150 mm, B = 100 mm
Load rating trucks:	300 kN (DIN 1072)
Load rating forklifts:	70 kN (DIN 1055-3)
Supply length:	3 mtr

Designs

Article No.	Profile height (h)	Recess (WxD)
AL.5.210/43	43 mm	330 x 53 mm
AL.5.210/53	53 mm	330 x 63 mm
AL.5.210/65	65 mm	330 x 75 mm
AL.5.210/75	75 mm	330 x 85 mm
Special heights on request.		

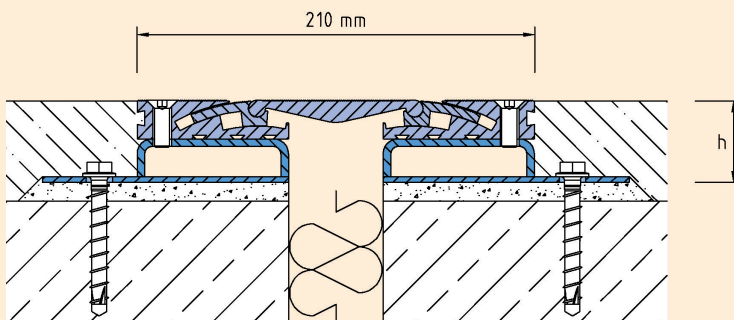

AL.5.210

Subject to technical change without notice.