



## ALR.8.150/..

- high load-bearing capacity
- with coating-flange

### FEATURES

permanently tight, corrosion-resistant, high flexibility (variable lengths, heights and widths), mesh size grating in 30x10 mm (30x30 mm on request)

### APPLICATIONS

parking decks, parking garages, underground garages, all industrial applications, shopping centres, railway stations, airports, exhibition halls

### MATERIAL

hot-dip galvanised steel, stainless steel V2A (V4A on request)

### COVERING TYPES

coating

### TRAFFICABILITY

passenger cars (trucks on request)

### FORMED PARTS


channel end piece (flange all around or upstand), corner piece, T-piece, cross piece, channel drain, 2-fold locking per grating

### NOTES

The individual channel elements are tightly welded together during installation on site.

For stainless steel, the general cleaning and care instructions must be observed (see also download area).

Installation by our own fitters recommended.

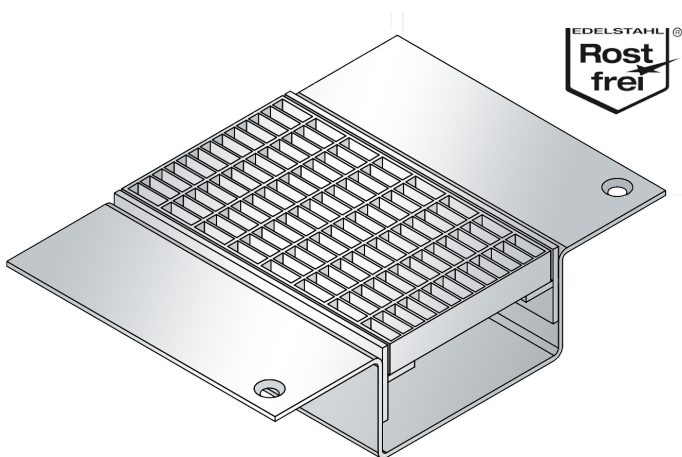


### TECHNICAL DATA

Material thickness channel body:	4 mm
Material thickness mounting bracket:	5 mm
Supply length:	3 mtr
Steel grating width:	150 mm

### DESIGNS

ARTICLE NO.	CHANNEL HEIGHT (h)	RECESS (BxT)
ALR.8.150/60	60 mm	210 x 70 mm
ALR.8.150/90	90 mm	210 x 100 mm
ALR.8.150/120	120 mm	210 x 130 mm

Special heights on request.

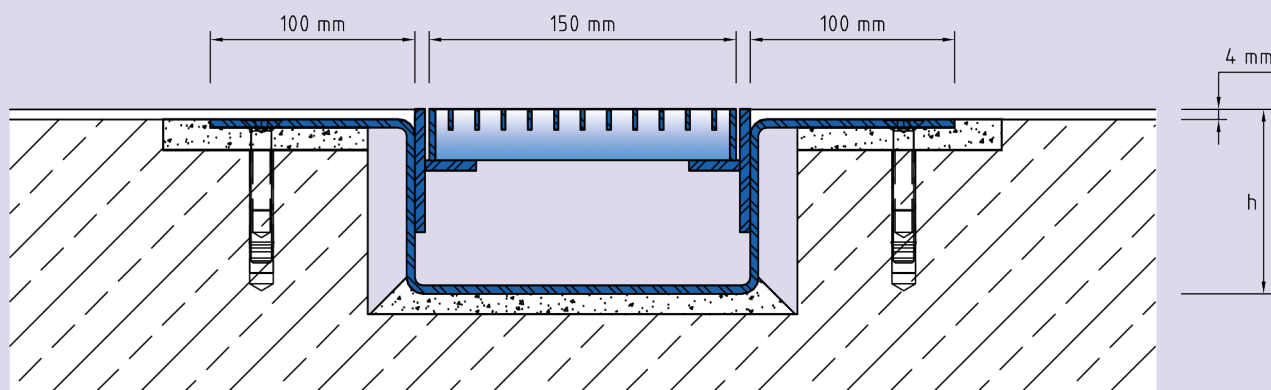

ALR.8.150

Subject to technical change without notice.