

## LFK7/..

- with loose/fixed flange
- covering separation
- edge termination

### FEATURES

high edge protection, professional coating separation

### APPLICATIONS

parking decks, parking garages, underground garages, ramp crossings, pedestrian bridges, all industrial applications, shopping centres, railway stations, airports

### MATERIAL

hot-dip galvanised steel, stainless steel V2A (V4A on request)

### COVERING TYPES

asphalt, concrete, screed

### FORMED PARTS

end piece, corner piece, T-piece, cross piece


### NOTES

The position of the loose flange (60x6 mm) can be positioned as required (horizontally or vertically on the inside or outside).

Threaded bolt M12x35 mm with washer and nut, e=150 mm

Loose flange according to DIN, l=1500 mm

Solid flange joints should be fully welded through and ground flat on the sealing side.

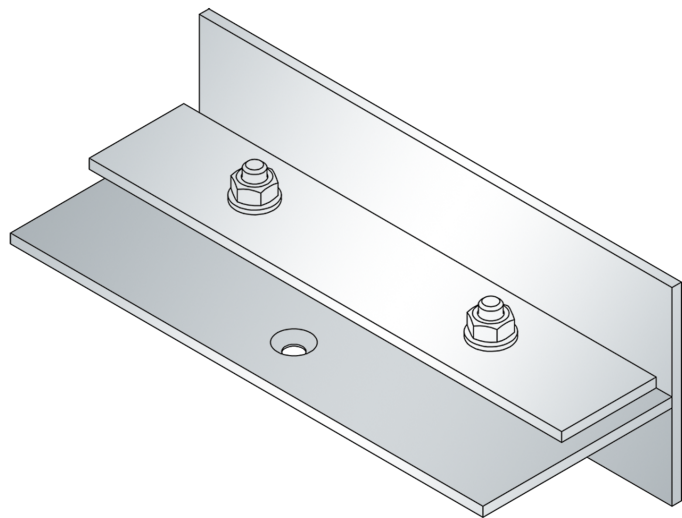


### TECHNICAL DATA

Material/sheet thickness: 6 mm  
Supply length: 3 mtr

### DESIGNS

ARTICLE NO.	HEIGHT (h)	RECESS (BxT)
LFK7/60	60 mm	140 x 20 mm
LFK7/80	80 mm	140 x 20 mm
LFK7/100	100 mm	140 x 20 mm

Special heights on request.

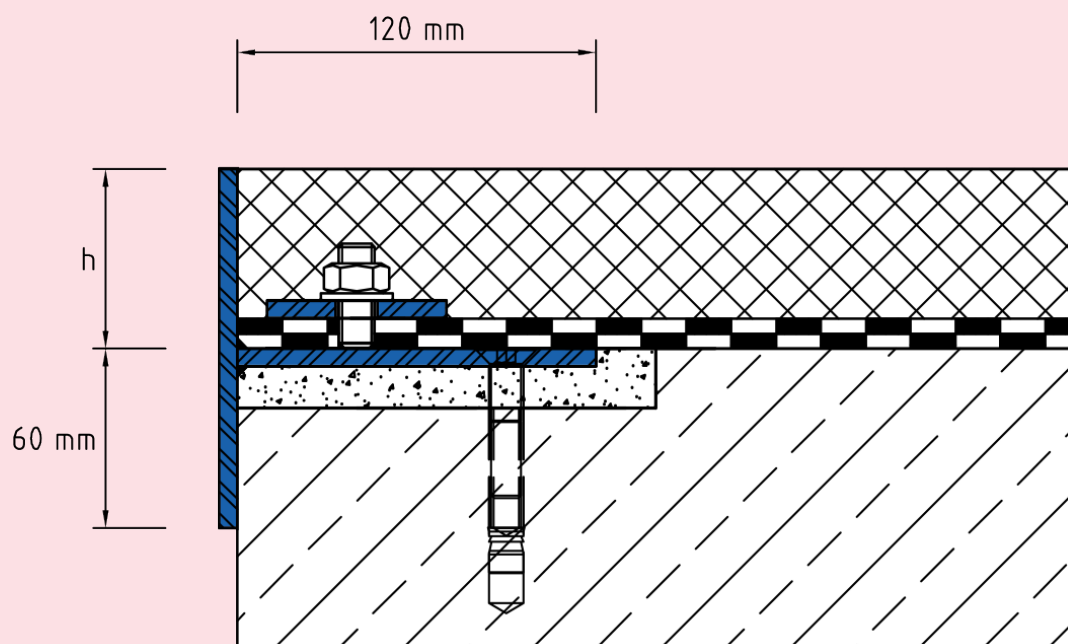

LFK7

Subject to technical change without notice.