



LFK9

- with loose/fixed flange
- edge termination

APPLICATIONS

outdoor, multi-storey and underground park decks, ramp accesses, pedestrian bridges, all industrial applications, shopping centres, railway stations, airports

MATERIAL

hot-dip galvanised steel, high-grade steel V4A (on request)

COVERING TYPES

asphalt, concrete, screed

FORMED PARTS


end piece, corner piece, T piece, cross piece

NOTES

stud bolt M12x35 mm with lining disc and nut

loose flange, l = 1500 mm

Solid flange joints should be fully welded through and ground flat on the sealing side.

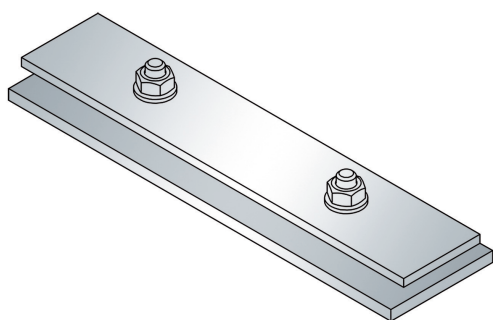

Technical data

Material thickness fixed flange: 8 mm

Material thickness loose flange: 6 mm

Supply length: 3 mtr


Designs

Article No.

LFK9

Recess(WxD)

120 x 20 mm

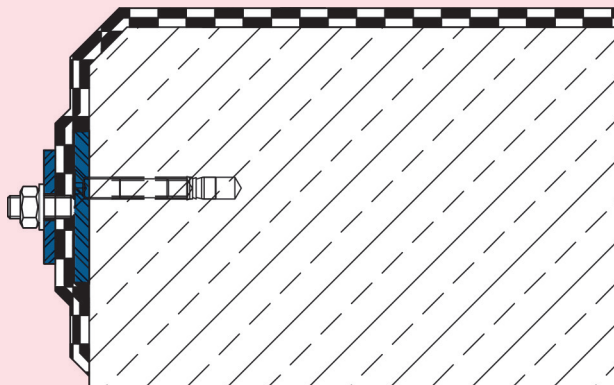

LFK9

Subject to technical change without notice.