



VA.6.110/..

- for heavy loads
- vibration-free trafficability
- visible surface in high-grade steel

FEATURES

resistant to heavy loads, trafficable by fork-lift trucks, punched bearing legs guarantee best connection to the subgrade/covering.

APPLICATIONS

all industrial applications, areas with use of driverless vehicular systems, shopping centres, railway stations, airports, exhibition halls

MATERIAL

hot-dip galvanised steel substructure and high-grade steel V2A surface

COVERING TYPES

coating, concrete, screed, industrial covering, natural and stone slabs

TRAFFICABILITY


industrial trucks (lifting trucks, fork-lifts etc.), passenger car, trucks

FORMED PARTS

corner piece, T piece, cross piece, transition floor to wall

NOTES

We recommend that the customer applies grout between profile and covering so as to avoid typical hairline cracks.

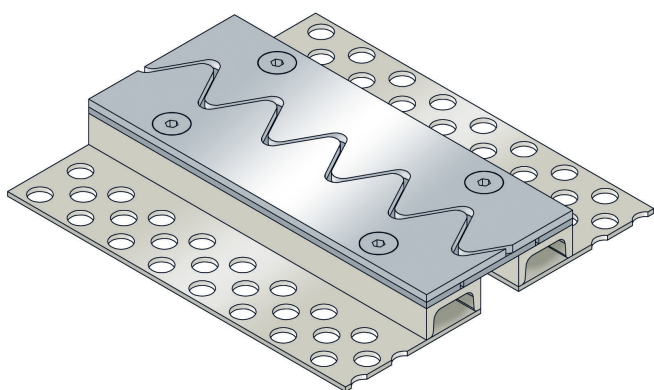


Technical data

Movement horizontal:	13 mm (-5/+8 mm)
Visible width:	108 mm
Maximal joint width:	30 mm
Load rating:	wheel load 5000 kg up to Ø 150 mm, B = 100 mm
Load rating trucks:	600 kN (DIN 1072)
Load rating forklifts:	150 kN (DIN 1055-3)
Supply length:	3 mtr

Designs

Article No.	Profile height (h)	Recess(WxD)
VA.6.110/32	31 mm	270 x 41 mm
VA.6.110/47	46 mm	270 x 56 mm
VA.6.110/62	61 mm	270 x 71 mm
VA.6.110/77	76 mm	270 x 86 mm
VA.6.110/92	91 mm	270 x 101 mm
Special heights on request.		

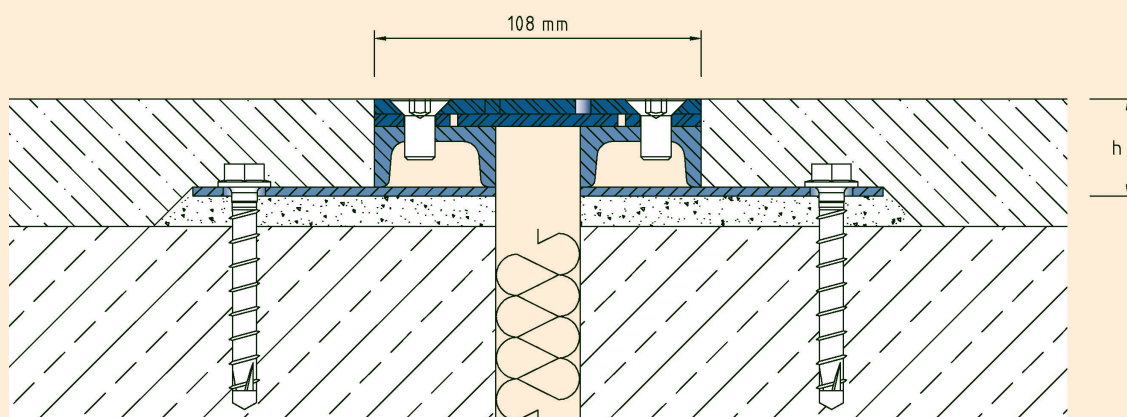

VA.6.110

Subject to technical change without notice.