




## VA.6.165/19

- for heavy loads
- low profile height
- vibration-free trafficability
- visible surface in high-grade steel

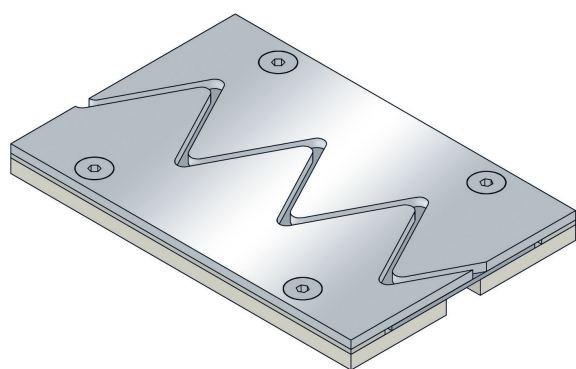

### FEATURES

resistant to heavy loads, trafficable by fork-lift trucks, the special profile design means that no bearing leg slips under the floor covering (this prevents thin industrial floor coverings from tearing)

### APPLICATIONS

all industrial applications, areas with use of driverless vehicular systems, shopping centres, railway stations, airports, exhibition halls

### MATERIAL

hot-dip galvanised steel substructure and high-grade steel V2A surface

### COVERING TYPES

coating, concrete, screed, industrial covering, magnesia flooring, natural and stone slabs

### TRAFFICABILITY

industrial trucks (lifting trucks, fork-lifts etc.), passenger car, trucks

### FORMED PARTS

corner piece, T piece, cross piece, transition floor to wall

### NOTES


We recommend that the customer applies grout between profile and covering so as to avoid typical hairline cracks.

### Technical data

Movement horizontal:	30 mm (-10/+20 mm)
Visible width:	165 mm
Maximal joint width:	15 mm
Load rating:	wheel load 5000 kg up to Ø 150 mm, B = 100 mm
Load rating trucks:	600 kN (DIN 1072)
Load rating forklifts:	150 kN (DIN 1055-3)
Supply length:	3 mtr

### Designs

Article No.	Profile height (h)	Recess(WxD)
VA.6.165/19	19 mm	300 x 29 mm

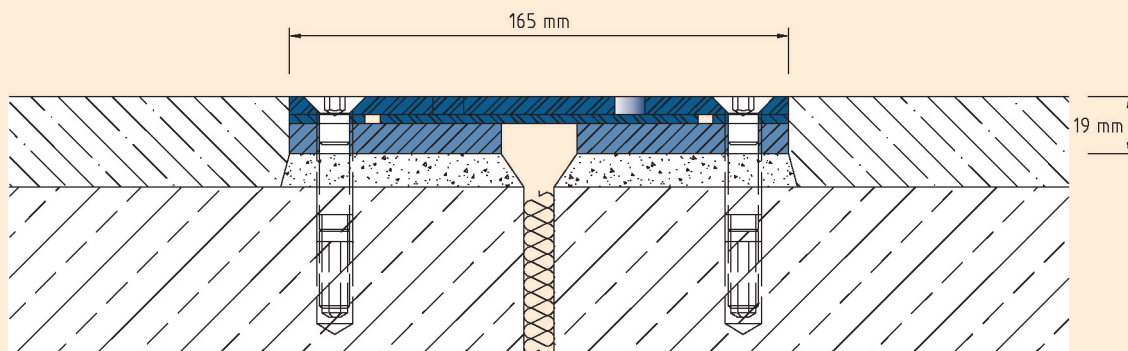

VA.6.165

Subject to technical change without notice.