# ALK.2.150/..

- **high load-bearing capacity**
- **with adhering flange**

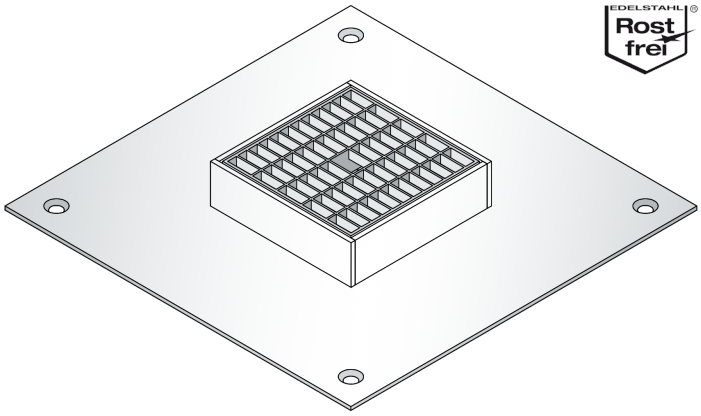

### FEATURES
resistant to heavy loads, permanently tight, corrosion-resistant, high flexibility (variable heights and widths), mesh size grating in 30x10 mm (30x30 mm on request), grid lock inclusive, drain pipe DN100, length 200 mm

### APPLICATIONS
parking decks, parking garages, underground garages, all industrial applications, shopping centres, railway stations, airports, exhibition halls

### MATERIAL
hot-dip galvanised steel, stainless steel V2A (V4A on request)

### COVERING TYPES
asphalt, screed

### TRAFFICABILITY
passenger cars (trucks on request)

### NOTES
Drainage slots are possible (on request).
For stainless steel, the general cleaning and care instructions must be observed (see also download area).
Installation by our own fitters recommended.

### TECHNICAL DATA

| | |
|---|---|
| Material thickness adhering flange: | 4 mm |
| Material thickness vertical base: | 5 mm |
| Steel grating width: | 150 mm |

### DESIGNS

| ARTICLE NO. | CHANNEL HEIGHT (h) | RECESS (BxT) |
|---|---|---|
| ALK.2.150/49 | 49 mm | 430 x 20 mm |
| ALK.2.150/59 | 59 mm | 430 x 20 mm |
| ALK.2.150/79 | 79 mm | 430 x 20 mm |

Special heights on request.

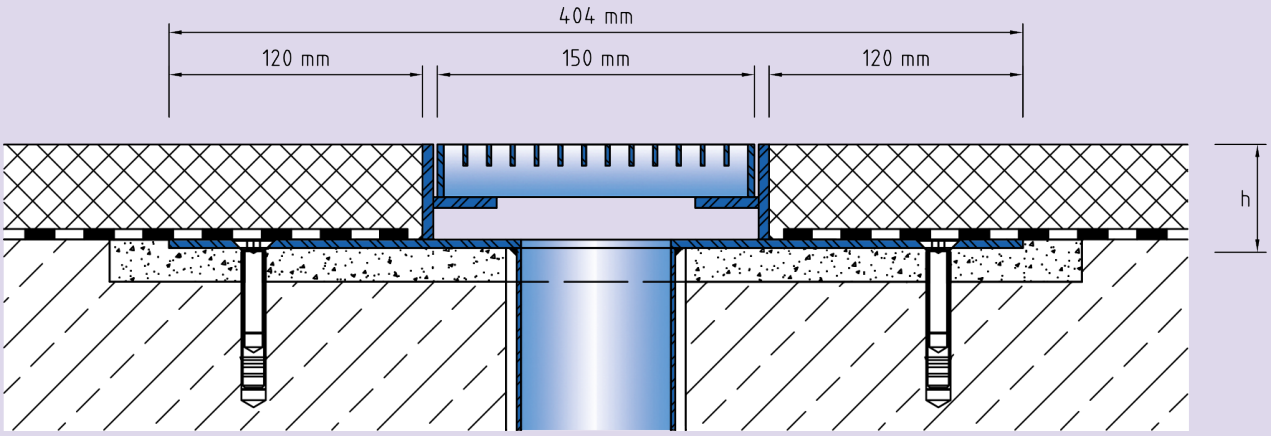


ALK.2.150

Subject to technical change without notice.