




# PUMPING PIT COVER

## PSA.1.200-200/..

- high load-bearing capacity
- with loose/fixed flange

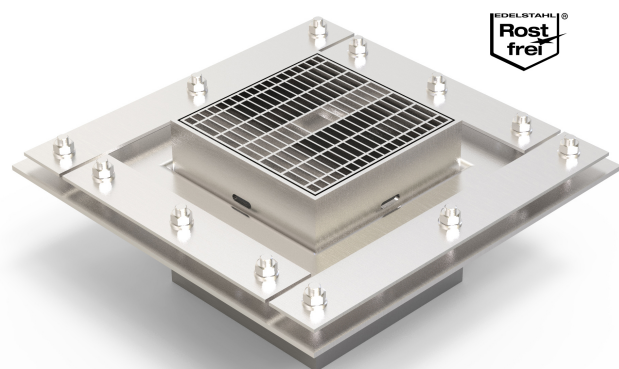

### FEATURES

resistant to heavy loads, , mesh size of the steel grating in 30X10 mm or 30x30 mm possible, grate adjustment inclusive

### APPLICATIONS

outdoor, multi-storey and underground park decks, all industrial applications, shopping centres, railway stations, airports, exhibition halls

### MATERIAL

hot-dip galvanised steel, high-grade steel V4A (on request)

### COVERING TYPES

asphalt, screed

### TRAFFICABILITY

truck (on request)

### NOTES

drainage slots are possible (on request).

For stainless steel gutters, the general cleaning and care instructions must be observed (see also [www.buprofile.de](http://www.buprofile.de) - Download section).

Other dimensions are available:

Item no.


- PSA.1.300-300/61
- PSA.1.400-400/61
- PSA.1.500-500/61
- PSA.1.600-600/61
- PSA.1.800-800/61
- PSA.1.1000-1000/61
- PSA.1.1200-1200/61

### Technical data

Material thickness fixed flange: 6 mm  
Material thickness vertical base: 5 mm  
Steel grating width: 200 mm

### Designs

Article No.	Channel height (h)	Recess(WxD)
PSA.1.200-200/61	61 mm	500 x 20 mm
Special heights on request.		

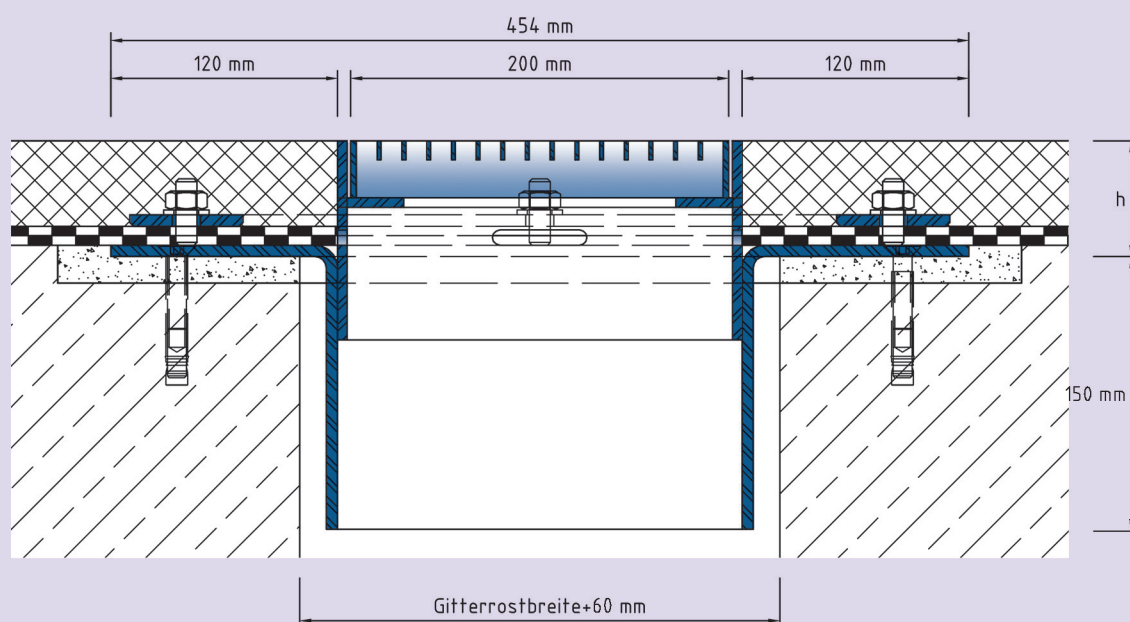

PSA.1.200-200

Subject to technical change without notice.